

VNA Master™ MS202xB / MS203xB Series

Handheld Vector Network Analyzer + Spectrum Analyzer

MS2024B

VNA: 500 kHz to 4 GHz

MS2025B

VNA: 500 kHz to 6 GHz

MS2034B

VNA: 500 kHz to 4 GHz
SPA: 9 kHz to 4 GHz

MS2035B

VNA: 500 kHz to 6 GHz
SPA: 9 kHz to 6 GHz

S-Parameter Analysis in the Field

The VNA Master MS202xB/3xB series is a compact handheld multi-function instrument that offers a portable yet powerful vector network analyzer, allowing you to do S-parameter analysis in the field – anytime, anywhere. The MS203xB models also offer a high-performance spectrum analyzer with industry-leading ultra-low noise floor. Based on Anritsu’s established handheld platform, the VNA Master offers unmatched measurement breadth, depth, and precision; reducing the number of different tools needed to analyze modern communication systems in the field, on a tower, on a flightline, or in a vehicle.



Vector Analyzer Key Features

- Broadband coverage of 500 kHz to 4/6 GHz
1-path, 2-port vector network analyzer
- Intuitive graphical user interface (GUI) with convenient touch screen
- VNA-quality error correction for directivity and source match
- 2-port transmission measurements: High/low power

+ Spectrum Analyzer Key Features

All of the above VNA features, plus:

- Measure: Occupied bandwidth, channel power, ACPR, C/I
- Interference Analyzer: Spectrogram, signal strength, RSSI, signal ID
- Frequency Accuracy: < ± 50 ppb with GPS on
- Traces: Normal, max hold, min hold, average, # of averages
- Detectors: Peak, negative, sample, quasi-peak, and true RMS
- Markers: 6, each with a delta marker, or 1 reference with 6 deltas
- PIM Hunting

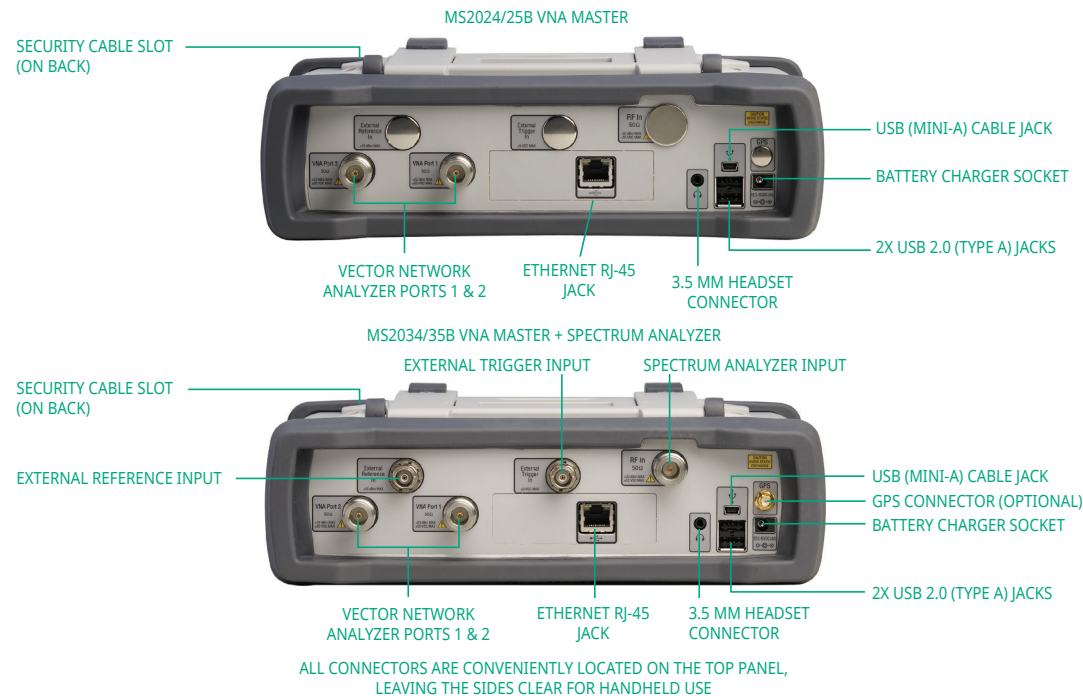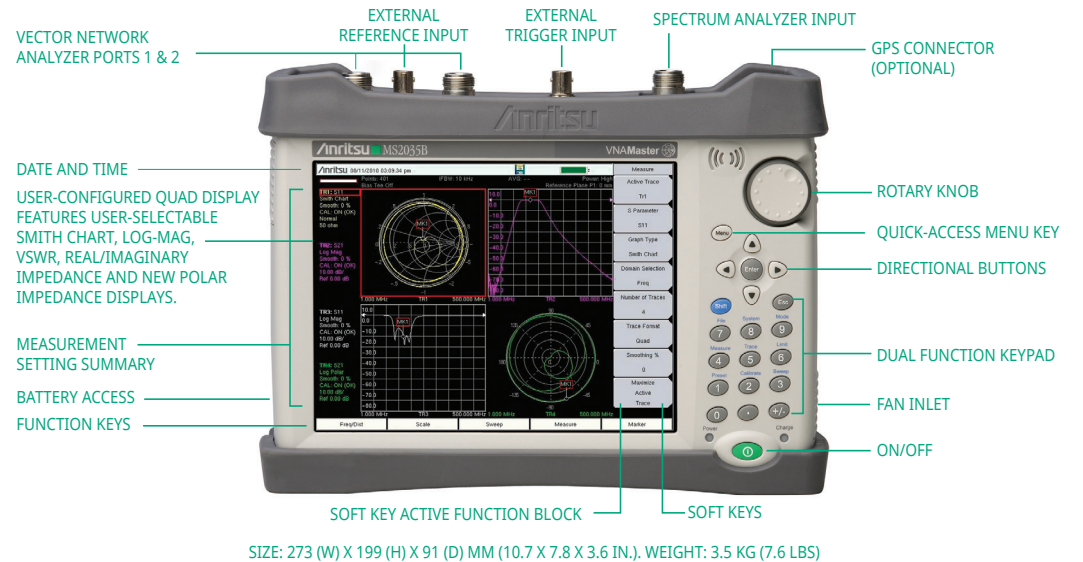

VNA Master™ MS202xB / MS203xB Series

Handheld Vector Network Analyzer + Spectrum Analyzer

Key Specifications

Vector Network Analyzer – now with standard Distance-to-Fault (DTF)	
Frequency	MS2024/34B 500 kHz to 4 GHz / MS2025/35B: 500 kHz to 6 GHz
Sweep Speed	850 μ s/data point
Directivity	> 42 dB at \leq 6 GHz
Dynamic Range	> 95 dB in 10 Hz RBW
+ Spectrum Analyzer (Models MS203xB Only)	
Frequency	MS2034B: 9 kHz to 4 GHz / MS2035B: 9 kHz to 6 GHz
Sweep Time	Minimum 100 ms, 7 μ s to 3600 seconds in zero span
Dynamic Range	> 95 dB (2.4 GHz), 2/3 (TOI-DANL) in 10 Hz RBW
General	
Internal Trace	>2,000 traces, >2,000 Setups
External Trace	Limited by the size of the USB Flash Drive
Connectivity	Ethernet, USB cable, USB Flash drive
Display	Resistive Touch Screen, 8.4 in. daylight viewable LCD 800 x 600 resolution
Temperature	Operating Temperature -10 °C to 55 °C, humidity 85% or less
Battery	Field replaceable Li-ion battery, 3.6 hours typical
Dimensions	273 mm x 199 mm x 91 mm (10.7 in x 7.8 in x 3.6 in)
Weight	3.5 kg (7.6 lbs) including battery

Options

Option Number	Description
Option 10	Built-In Variable Voltage Bias Tee
Option 15	Vector Voltmeter
Option 19	High Accuracy Power Meter (Requires USB sensors, sold separately)
Option 25	Interference Analysis (Requires external antenna, option 31 recommended) (MS203xB Only)
Option 27	Channel Scanner (Requires external antenna) (MS203xB Only)
Option 31	GPS Receiver (Requires GPS antenna, sold separately)
Option 431	Coverage Mapping (Requires option 31) (MS203xB Only)
Option 509	AM/FM/PM Demodulation Analyzer (MS203xB Only)
Option 98	Z-540 Calibration
Option 99	Premium Calibration

Standard Accessories

Part Number	Description
2000-1371-R	Ethernet Cable 2.1 m (7 ft)
2000-1691-R	Stylus with Coiled Tether
2000-1797-R	Screen Protector Film (x2, one factory installed, one spare)
2000-1654-R	Soft Carrying Case
	Warranty: 3 years standard (battery 1 year) Certificate of Calibration and Conformance
633-75	Rechargeable Battery, Li-Ion, 7500 mAh
40-187-R	AC-DC Adapter
806-141-R	Automotive Power Adapter, 12 VDC, 60 W
3-2000-1498	USB A-type to Mini USB B-type cable, 3.05 m (10 ft.)

Optional Accessories

Portable Antennas



Adapters



Filters



Attenuators



Directional Antennas



Transit Cases



For more information go to www.anritsu.com