

# R&S®FSVR Real-Time Spectrum Analyzer Specifications

 **CDIP**  
www.cdip.ru  
info@cdip.ru  
+7 (495) 956-20-22



 **ROHDE & SCHWARZ**

## CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications.....</b>	<b>4</b>
<b>Specifications for all operating modes .....</b>	<b>4</b>
Frequency .....	4
<b>Signal and spectrum analyzer mode .....</b>	<b>5</b>
Sweep time.....	6
Resolution bandwidths.....	6
Level.....	7
Measurement speed.....	14
Trigger functions.....	14
I/Q data .....	14
<b>Real-time spectrum analyzer mode.....</b>	<b>15</b>
Level.....	16
Result display .....	17
I/Q data <sup>9</sup> .....	18
Trigger.....	19
<b>Inputs and outputs.....</b>	<b>20</b>
<b>General data .....</b>	<b>22</b>
<b>Options .....</b>	<b>24</b>
R&S®FSV-B3 audio demodulator.....	24
R&S®FSV-B5 additional interfaces.....	24
R&S®FSV-B17 digital baseband interface <sup>9</sup> .....	25
R&S®FSV-B21 LO/IF ports for external mixers (for R&S®FSVR30 and R&S®FSVR40 only).....	25
<b>Ordering information .....</b>	<b>26</b>
Options.....	26
Upgrade Kits .....	27
Recommended extras.....	28
Power sensors supported by the R&S®FSV-K9 option .....	29
Service options .....	30

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

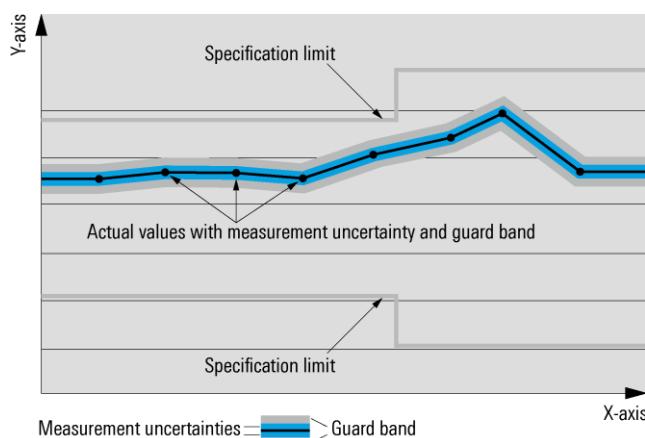

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

## Specifications

Operating modes	real-time spectrum analyzer signal and spectrum analyzer
-----------------	---

## Specifications for all operating modes

### Frequency


Frequency range	R&S®FSVR7 DC-coupled AC-coupled R&S®FSVR13 DC-coupled AC-coupled R&S®FSVR30 DC-coupled AC-coupled R&S®FSVR40 DC-coupled AC-coupled	10 Hz to 7 GHz 1 MHz to 7 GHz 10 Hz to 13.6 GHz 10 MHz to 13.6 GHz 10 Hz to 30 GHz 10 MHz to 30 GHz 10 Hz to 40 GHz 10 MHz to 40 GHz
Frequency resolution		0.01 Hz

Reference frequency, internal		
Accuracy		$\pm((\text{time since last adjustment} \times \text{aging rate}) + \text{temperature drift} + \text{calibration accuracy})$
Aging per year	standard	$\pm 1 \times 10^{-6}$
	with R&S®FSV-B4 OCXO reference frequency option	$\pm 1 \times 10^{-7}$
Temperature drift (+5 °C to +45 °C)	standard	$\pm 1 \times 10^{-6}$
	with R&S®FSV-B4, OCXO reference frequency option, model .02	$\pm 1 \times 10^{-7}$
	with R&S®FSV-B4, OCXO extended frequency stability option, model .03	$\pm 1 \times 10^{-8}$
Max. initial calibration accuracy	standard	$\pm 5 \times 10^{-7}$
	with R&S®FSV-B4 OCXO reference frequency option	$\pm 5 \times 10^{-8}$

# Signal and spectrum analyzer mode

Frequency readout		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10\% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value range	691 101 to 32001
Marker tuning frequency step size	marker step size = sweep points marker step size = standard	span/(sweep points - 1) span/(default sweep points - 1)
Frequency counter resolution	signal and spectrum analyzer mode only	0.001 Hz
Count accuracy	signal and spectrum analyzer mode only	$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2} (\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		$\pm 0.1\%$

Spectral purity		
SSB phase noise	frequency = 500 MHz, carrier offset	
	100 Hz	< -84 dBc (1 Hz)
	1 kHz	< -101 dBc (1 Hz)
	10 kHz	< -106 dBc (1 Hz)
	100 kHz	< -115 dBc (1 Hz)
	1 MHz	< -134 dBc (1 Hz)
	10 MHz	< -150 dBc (1 Hz) (nom.)
Residual FM	frequency = 500 MHz, RBW = 1 kHz, sweep time = 100 ms	< 3 Hz (nom.)

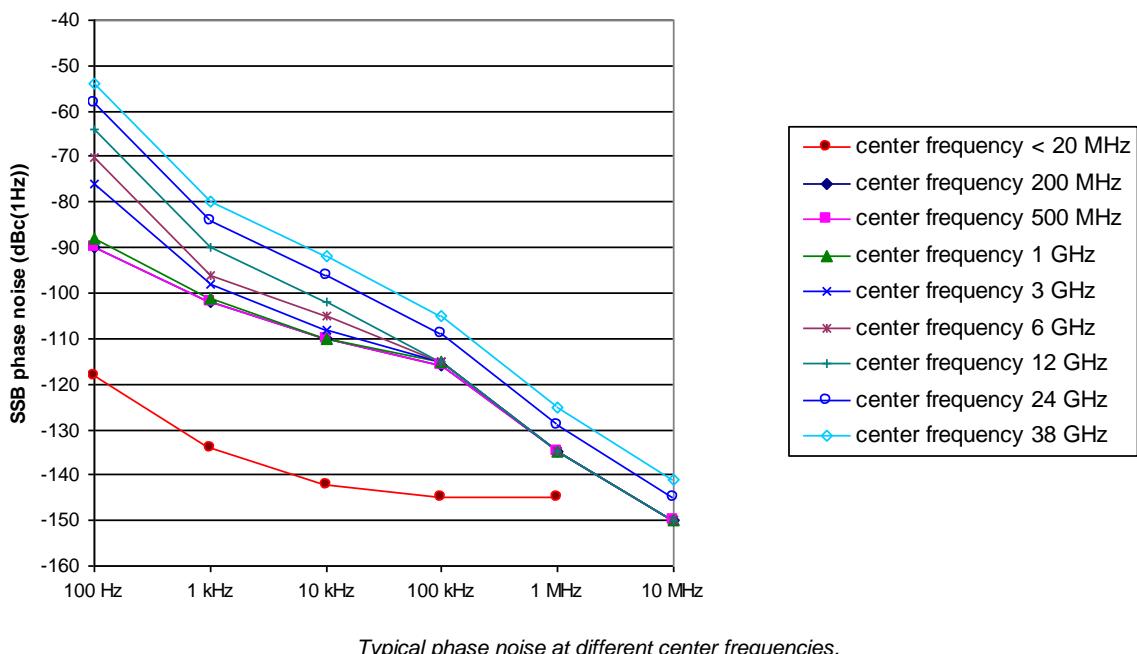

## Sweep time

Range	span = 0 Hz	1 µs to 16000 s
	span ≥ 10 Hz, swept	1 ms to 16000 s <sup>1</sup>
	span ≥ 10 Hz, FFT	7 µs to 16000 s <sup>2</sup>
Sweep time accuracy	span = 0 Hz	±0.1 % (nom.)
	span ≥ 10 Hz, swept	±3 % (nom.)

## Resolution bandwidths

Sweep filters and FFT filters		
Resolution bandwidths (-3 dB)	span ≥ 10 Hz, sweep filters	1 Hz to 10 MHz in 1/2/3/5 sequence
	span ≥ 10 Hz, FFT filters	1 Hz to 300 kHz in 1/2/3/5 sequence
	span = 0 Hz	20 MHz, 28 MHz, 40 MHz <sup>3</sup> additionally
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 5 (nom.)

Channel filters		
Bandwidths (-3 dB)	standard (RRC = root raised cosine)	100 Hz, 200 Hz, 300 Hz, 500 Hz 1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/24.3 (RRC)/ 25/30/50/100/150/192/200/300/500 kHz 1/1.228/1.28 (RRC)/1.5/2/3/3.84 (RRC)/ 4.096 (RRC)/5/10/20/28/40 MHz <sup>3</sup>
Bandwidth accuracy		< 2 % (nom.)
Shape factor 60 dB:3 dB		< 2 (nom.)

Video bandwidths		1 Hz to 10 MHz in 1/2/3/5 sequence, 20 MHz, 28 MHz, 40 MHz
------------------	--	---

Signal analysis bandwidth		40 MHz (nom.) <sup>3</sup>
---------------------------	--	----------------------------

<sup>1</sup> Net sweep time without additional hardware settling time.

<sup>2</sup> Time for data acquisition for FFT calculation.

<sup>3</sup> YIG preselector = off with bandwidth = 40 MHz and f > 7 GHz.

## Level

Display range	displayed noise floor up to +30 dBm	
---------------	-------------------------------------	--

<b>Max. input level</b>		
DC voltage	AC coupled	50 V
	DC coupled	0 V
CW RF power	RF attenuation 0 dB RF preamplifier = off with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on	20 dBm (= 0.1 W) 13 dBm (= 0.02 W)
	RF attenuation ≥ 10 dB RF preamplifier = off with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on	30 dBm (= 1 W) 23 dBm (= 0.2 W)
Pulse spectral density	RF attenuation 0 dB, RF preamplifier = off	97 dB µV/MHz
Max. pulse voltage	RF attenuation ≥ 10 dB	150 V
Max. pulse energy	RF attenuation ≥ 10 dB, 10 µs	1 mWs

<b>Intermodulation</b>		
1 dB compression of input mixer	RF attenuation 0 dB, RF preamplifier = off f ≤ 7 GHz f > 7 GHz with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on, RF attenuation 0 dB f ≤ 7 GHz f > 7 GHz	+3 dBm (nom.) +5 dBm (nom.) -12 dBm (nom.) -25 dBm (nom.)
Third-order intercept point (TOI)	RF attenuation 0 dB, level 2 × -15 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger, RF preamplifier = off 10 MHz ≤ f <sub>in</sub> < 100 MHz 100 MHz ≤ f <sub>in</sub> < 3.6 GHz 3.6 GHz ≤ f <sub>in</sub> ≤ 40 GHz with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on, RF attenuation 0 dB, level 2 × -45 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger 10 MHz ≤ f <sub>in</sub> < 100 MHz 100 MHz ≤ f <sub>in</sub> < 3.6 GHz 3.6 GHz ≤ f <sub>in</sub> ≤ 7 GHz 7 GHz ≤ f <sub>in</sub> ≤ 40 GHz	> 12 dBm, 15 dBm (typ.) > 13 dBm, 16 dBm (typ.) > 15 dBm, 18 dBm (typ.) -3 dBm (nom.) -2 dBm (nom.) 0 dBm (nom.) -10 dBm (nom.)
Second harmonic intercept (SHI)	RF attenuation 0 dB, level -10 dBm, RF preamplifier = off 100 MHz < f <sub>in</sub> ≤ 3.5 GHz 3.5 GHz < f <sub>in</sub> ≤ 20 GHz standard with R&S®FSV-B24 option with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on, RF attenuation 0 dB, level -40 dBm 100 MHz < f <sub>in</sub> ≤ 3.5 GHz 3.5 GHz < f <sub>in</sub> ≤ 20 GHz	45 dBm (nom.) 80 dBm (nom.) 75 dBm (nom.) 25 dBm (nom.) 10 dBm (nom.)

<b>Displayed average noise level without preamplifier options</b>	
0 dB RF attenuation, termination $50 \Omega$ , log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker	
10 Hz	< -90 dBm (nom.)
20 Hz	< -100 dBm, -110 dBm (typ.)
100 Hz	< -110 dBm, -120 dBm (typ.)
1 kHz	< -120 dBm, -130 dBm (typ.)
0 dB RF attenuation, termination $50 \Omega$ , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker	
<b>R&amp;S®FSVR7</b>	
9 kHz $\leq f < 100$ kHz	< -130 dBm, -140 dBm (typ.)
100 kHz $\leq f < 1$ MHz	< -145 dBm, -150 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -152 dBm, -155 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -150 dBm, -153 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -148 dBm, -151 dBm (typ.)
6 GHz $\leq f \leq 7$ GHz	< -146 dBm, -149 dBm (typ.)
<b>R&amp;S®FSVR13, R&amp;S®FSVR30</b>	
9 kHz $\leq f < 100$ kHz	< -130 dBm, -140 dBm (typ.)
100 kHz $\leq f < 1$ MHz	< -145 dBm, -150 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -151 dBm, -154 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -149 dBm, -152 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -146 dBm, -149 dBm (typ.)
6 GHz $\leq f < 7.4$ GHz	< -144 dBm, -147 dBm (typ.)
7.4 GHz $\leq f < 15$ GHz	< -147 dBm, -150 dBm (typ.)
15 GHz $\leq f < 30$ GHz	< -142 dBm, -145 dBm (typ.)
<b>R&amp;S®FSVR40</b>	
9 kHz $\leq f < 100$ kHz	< -130 dBm, -140 dBm (typ.)
100 kHz $\leq f < 1$ MHz	< -145 dBm, -150 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -151 dBm, -154 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -149 dBm, -152 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -146 dBm, -149 dBm (typ.)
6 GHz $\leq f < 7.4$ GHz	< -144 dBm, -147 dBm (typ.)
7.4 GHz $\leq f < 15$ GHz	< -144 dBm, -147 dBm (typ.)
15 GHz $\leq f < 34$ GHz	< -140 dBm, -143 dBm (typ.)
34 GHz $\leq f \leq 40$ GHz	< -133 dBm, -136 dBm (typ.)

**Displayed average noise level with R&S®FSV-B22 preamplifier option**

0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = off	
10 Hz	< -90 dBm (nom.)
20 Hz	< -100 dBm, -110 dBm (typ.)
100 Hz	< -110 dBm, -120 dBm (typ.)
1 kHz	< -120 dBm, -130 dBm (typ.)
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = off	
<b>R&amp;S®FSVR7</b>	
9 kHz ≤ f < 100 kHz	< -130 dBm, -140 dBm (typ.)
100 kHz ≤ f < 1 MHz	< -145 dBm, -150 dBm (typ.)
1 MHz ≤ f < 1 GHz	< -152 dBm, -155 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -150 dBm, -153 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -148 dBm, -151 dBm (typ.)
6 GHz ≤ f ≤ 7 GHz	< -146 dBm, -149 dBm (typ.)
<b>R&amp;S®FSVR13, R&amp;S®FSVR30</b>	
9 kHz ≤ f < 100 kHz	< -130 dBm, -140 dBm (typ.)
100 kHz ≤ f < 1 MHz	< -145 dBm, -150 dBm (typ.)
1 MHz ≤ f < 1 GHz	< -151 dBm, -154 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -149 dBm, -152 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -146 dBm, -149 dBm (typ.)
6 GHz ≤ f < 7.4 GHz	< -144 dBm, -147 dBm (typ.)
7.4 GHz ≤ f < 15 GHz	< -147 dBm, -150 dBm (typ.)
15 GHz ≤ f ≤ 30 GHz	< -142 dBm, -145 dBm (typ.)
<b>R&amp;S®FSVR40</b>	
9 kHz ≤ f < 100 kHz	< -130 dBm, -140 dBm (typ.)
100 kHz ≤ f < 1 MHz	< -145 dBm, -150 dBm (typ.)
1 MHz ≤ f < 1 GHz	< -151 dBm, -154 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -149 dBm, -152 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -146 dBm, -149 dBm (typ.)
6 GHz ≤ f < 7.4 GHz	< -144 dBm, -147 dBm (typ.)
7.4 GHz ≤ f < 15 GHz	< -144 dBm, -147 dBm (typ.)
15 GHz ≤ f < 34 GHz	< -140 dBm, -143 dBm (typ.)
34 GHz ≤ f ≤ 40 GHz	< -133 dBm, -136 dBm (typ.)
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = on	
<b>R&amp;S®FSVR7</b>	
100 kHz ≤ f < 1 MHz	< -150 dBm, -155 dBm (typ.)
1 MHz ≤ f < 1 GHz	< -162 dBm, -165 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -160 dBm, -163 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -158 dBm, -161 dBm (typ.)
6 GHz ≤ f ≤ 7 GHz	< -156 dBm, -159 dBm (typ.)
<b>R&amp;S®FSVR13, R&amp;S®FSVR30, R&amp;S®FSVR40</b>	
100 kHz ≤ f < 1 MHz	< -145 dBm, -148 dBm (typ.)
1 MHz ≤ f < 20 MHz	< -155 dBm, -158 dBm (typ.)
20 MHz ≤ f < 1 GHz	< -160 dBm, -163 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -159 dBm, -162 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -156 dBm, -159 dBm (typ.)
6 GHz ≤ f ≤ 7 GHz	< -154 dBm, -157 dBm (typ.)

<b>Displayed average noise level with R&amp;S®FSV-B24 preamplifier option</b>	
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = off	
10 Hz	< -90 dBm (nom.)
20 Hz	< -100 dBm, -110 dBm (typ.)
100 Hz	< -110 dBm, -120 dBm (typ.)
1 kHz	< -120 dBm, -130 dBm (typ.)
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = off	
R&S®FSVR13, R&S®FSVR30	
9 kHz ≤ f < 100 kHz	< -130 dBm, -140 dBm (typ.)
100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -150 dBm (typ.)
1 MHz ≤ f < 1 GHz	< -150 dBm, typ. -153 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -147 dBm, typ. -150 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -144 dBm, typ. -147 dBm (typ.)
6 GHz ≤ f < 7.4 GHz	< -141 dBm, typ. -144 dBm (typ.)
7.4 GHz ≤ f < 13.6 GHz	< -144 dBm, typ. -147 dBm (typ.)
13.6 GHz ≤ f < 15 GHz	< -142 dBm, typ. -145 dBm (typ.)
15 GHz ≤ f ≤ 30 GHz	< -139 dBm, typ. -142 dBm (typ.)
R&S®FSVR40	
9 kHz ≤ f < 100 kHz	< -130 dBm, typ. -140 dBm (typ.)
100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -150 dBm (typ.)
1 MHz ≤ f < 1 GHz	< -150 dBm, typ. -153 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -147 dBm, typ. -150 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -144 dBm, typ. -147 dBm (typ.)
6 GHz ≤ f < 7.4 GHz	< -141 dBm, typ. -144 dBm (typ.)
7.4 GHz ≤ f < 13.6 GHz	< -142 dBm, typ. -145 dBm (typ.)
13.6 GHz ≤ f < 15 GHz	< -140 dBm, typ. -143 dBm (typ.)
15 GHz ≤ f < 34 GHz	< -137 dBm, typ. -140 dBm (typ.)
34 GHz ≤ f ≤ 40 GHz	< -129 dBm, typ. -132 dBm (typ.)
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = on, YIG preselector = on	
R&S®FSVR13, R&S®FSVR30, R&S®FSVR40	
100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -148 dBm (typ.)
1 MHz ≤ f < 20 MHz	< -155 dBm, typ. -158 dBm (typ.)
20 MHz ≤ f < 1 GHz	< -160 dBm, typ. -163 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -157 dBm, typ. -160 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -153 dBm, typ. -156 dBm (typ.)
6 GHz ≤ f ≤ 7.4 GHz	< -150 dBm, typ. -153 dBm (typ.)
7.4 GHz ≤ f < 15 GHz	< -164 dBm, typ. -167 dBm (typ.)
15 GHz ≤ f < 34 GHz	< -159 dBm, typ. -162 dBm (typ.)
34 GHz ≤ f ≤ 40 GHz	< -153 dBm, typ. -155 dBm (typ.)
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = on, YIG preselector = off	
R&S®FSVR13, R&S®FSVR30, R&S®FSVR40	
100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -148 dBm (typ.)
1 MHz ≤ f < 20 MHz	< -155 dBm, typ. -158 dBm (typ.)
20 MHz ≤ f < 1 GHz	< -160 dBm, typ. -163 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -157 dBm, typ. -160 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -153 dBm, typ. -156 dBm (typ.)
6 GHz ≤ f < 7 GHz	< -150 dBm, typ. -153 dBm (typ.)
7 GHz ≤ f < 7.4 GHz	< -146 dBm, typ. -149 dBm (typ.)
7.4 GHz ≤ f < 15 GHz	< -160 dBm, typ. -163 dBm (typ.)
15 GHz ≤ f < 34 GHz	< -155 dBm, typ. -158 dBm (typ.)
34 GHz ≤ f ≤ 40 GHz	< -148 dBm, typ. -150 dBm (typ.)

<b>Spurious responses</b>	YIG preselector = on for $f \geq 7$ GHz	
Image response	20 MHz $\leq f \leq 7$ GHz $f_{in} - 2 \times 8409.9$ MHz (first IF) < -80 dBc (nom.) $f_{in} - 2 \times 729.9$ MHz (second IF) < -80 dBc $f_{in} - 2 \times 89.9$ MHz (third IF) < -80 dBc 7 GHz $< f < 30$ GHz $f_{in} \pm 2 \times 729.9$ MHz (first IF) < -80 dBc $f_{in} - 2 \times 89.9$ MHz (second IF) < -80 dBc 30 GHz $\leq f \leq 40$ GHz $f_{in} \pm 2 \times 729.9$ MHz (first IF) < -70 dBc $f_{in} - 2 \times 89.9$ MHz (second IF) < -80 dBc	
Intermediate frequency response	20 MHz $\leq f \leq 7$ GHz	< -70 dBc (nom.)
	first IF (8409.9 MHz)	< -80 dBc
	second IF (729.9 MHz)	< -80 dBc
	third IF (89.9 MHz)	< -80 dBc
	7 GHz $< f \leq 40$ GHz	
	first IF (729.9 MHz)	< -80 dBc
	second IF (89.9 MHz)	< -80 dBc
Residual spurious response	0 dB RF attenuation	
	$f \leq 1$ MHz	< -90 dBm
	$f > 1$ MHz	< -103 dBm
Local oscillator related spurious	$f < 15$ GHz	
	1 kHz $\leq$ offset from carrier $\leq 10$ MHz	< -70 dBc
	offset from carrier $> 10$ MHz	< -80 dBc
	15 GHz $\leq f < 30$ GHz	
	1 kHz $\leq$ offset from carrier $\leq 10$ MHz	< -64 dBc
	offset from carrier $> 10$ MHz	< -74 dBc
	30 GHz $\leq f \leq 40$ GHz	
	1 kHz $\leq$ offset from carrier $\leq 10$ MHz	< -58 dBc
	offset from carrier $> 10$ MHz	< -68 dBc
Other interfering signals		
Subharmonic of first LO	20 MHz $\leq f < 7$ GHz, spurious at $8410$ MHz $- 2 \times f_{in}$	< -70 dBc
Harmonic of first LO	mixer level $< -25$ dBm, spurious at $f_{in} - 4205$ MHz	< -70 dBc

<b>Level display</b>		
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max, peak, min. peak, auto peak (normal), sample, RMS, average
Trace functions		clear/write, max hold, min hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW
	linear level display	$\mu$ V, mV, $\mu$ A, mA, pW, nW

<b>Spectrogram display</b>	
Result display	color-graded bitmap
Spectrogram bitmap color depth	240 colors
Dynamic range covered by bitmap colors	selectable, up to 200 dB (nom.)
History depth	max. 100000 frames <sup>4</sup>
Recording mode	single trace, continuous, frame count
Trace detector	max. peak, min. peak, sample, RMS, average
Number of markers	16
Marker readout	frequency, time/frame number, level

<b>Level measurement uncertainty</b>	
Absolute level uncertainty at 64 MHz	RBW = 10 kHz, level –10 dBm, reference level –10 dBm, RF attenuation 10 dB +20 °C to +30 °C < 0.2 dB ( $\sigma = 0.07$ dB) +5 °C to +40 °C < 0.35 dB ( $\sigma = 0.12$ dB)
Frequency response referenced to 64 MHz	DC coupling, RF attenuation 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier = off, +20 °C to +30 °C 9 kHz ≤ f < 10 MHz < 0.5 dB ( $\sigma = 0.17$ dB) 10 MHz ≤ f < 3.6 GHz < 0.3 dB ( $\sigma = 0.1$ dB) 3.6 GHz ≤ f < 7 GHz < 0.5 dB ( $\sigma = 0.17$ dB) 7 GHz ≤ f < 13.6 GHz, span < 1 GHz < 1.5 dB ( $\sigma = 0.5$ dB) 13.6 GHz ≤ f < 30 GHz, span < 1 GHz < 2 dB ( $\sigma = 0.66$ dB) 30 GHz ≤ f ≤ 40 GHz, span < 1 GHz < 2.5 dB ( $\sigma = 0.83$ dB) any setting of RF attenuation, RF preamplifier = off, +5 °C to +40 °C 9 kHz ≤ f < 3.6 GHz < 1 dB ( $\sigma = 0.33$ dB) 3.6 GHz ≤ f < 7 GHz < 1.5 dB ( $\sigma = 0.5$ dB) 7 GHz ≤ f < 13.6 GHz < 2.5 dB ( $\sigma = 0.83$ dB) 13.6 GHz ≤ f < 26.5 GHz < 3 dB ( $\sigma = 1$ dB) 26.5 GHz ≤ f < 30 GHz < 3.5 dB ( $\sigma = 1.17$ dB) 30 GHz ≤ f ≤ 40 GHz < 4 dB ( $\sigma = 1.34$ dB) any setting of RF attenuation, RF preamplifier = on, +5 °C to +40 °C 9 kHz ≤ f < 3.6 GHz < 1 dB ( $\sigma = 0.33$ dB) 3.6 GHz ≤ f < 7 GHz < 1.5 dB ( $\sigma = 0.5$ dB) 7 GHz ≤ f < 13.6 GHz < 3 dB ( $\sigma = 1$ dB) 13.6 GHz ≤ f < 30 GHz < 3.5 dB ( $\sigma = 1.17$ dB) 30 GHz ≤ f ≤ 40 GHz < 4.5 dB ( $\sigma = 1.5$ dB) DC coupling, RF preamplifier = off, +5 °C to +40 °C 10 Hz ≤ f < 20 Hz < 1.5 dB (nom.) 20 Hz ≤ f < 9 kHz < 1 dB ( $\sigma = 0.33$ dB)
Attenuator switching uncertainty	f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation < 0.2 dB ( $\sigma = 0.07$ dB)
Uncertainty of reference level setting	0 dB <sup>5</sup> (nom.)
Bandwidth switching uncertainty	referenced to RBW = 10 kHz sweep filters < 0.1 dB ( $\sigma = 0.04$ dB) FFT filters < 0.2 dB ( $\sigma = 0.07$ dB)

<sup>4</sup> A frame is the measurement result displayed in one row of the spectrogram. It may consist of one or more traces, depending on the set sweep count. For example, a sweep count of 2 means that two traces will be combined to one row in the spectrogram using the set trace detector.

<sup>5</sup> The setting of the reference level affects only the graphical representation of the measurement result on the display, not the measurement itself. Therefore, the reference level setting causes no additional uncertainty in measurement results.

<b>Display nonlinearity</b>		
Logarithmic level display	S/N > 16 dB	
	0 dB to -50 dB	< 0.1 dB ( $\sigma = 0.04 \text{ dB}$ )
	-50 dB to -60 dB	< 0.15 dB ( $\sigma = 0.05 \text{ dB}$ )
	-60 dB to -70 dB	< 0.2 dB ( $\sigma = 0.07 \text{ dB}$ )
Linear level display	S/N > 16 dB, 0 dB to -70 dB	< 5 % of reference level (nom.)

<b>Total measurement uncertainty</b>	
	signal level 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time auto, sweep type = sweep, RF attenuation 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier = off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C
9 kHz ≤ f < 10 MHz	±0.40 dB
10 MHz ≤ f < 3.6 GHz	±0.31 dB
3.6 GHz ≤ f < 7 GHz	±0.40 dB
7 GHz ≤ f < 13.6 GHz	±1.01 dB
13.6 GHz ≤ f < 30 GHz	±1.33 dB
30 GHz ≤ f ≤ 40 GHz	±1.65 dB

## Measurement speed

Local measurement and display update rate		1.1 ms (900/s) (meas.)
Remote measurement, 1000 sweep averages <sup>6</sup>		1 ms (1000/s) (meas.)
Remote measurement and LAN transfer <sup>6</sup>		3 ms (333/s) (meas.)
Marker peak search		1.5 ms (meas.)
Center frequency tune and transfer <sup>6</sup>	$f \leq 7 \text{ GHz}$	15 ms (meas.)
	$f > 7 \text{ GHz}$	28 ms (meas.)

## Trigger functions

<b>Trigger</b>		
Trigger source		free run, video, external, IF power
Trigger offset	span $\geq 10 \text{ Hz}$	31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of offset)
	span = 0 Hz	(–sweep time) to 30 s, min. resolution 31.25 ns (or 1 % of offset)
Max. deviation of trigger offset		$\pm(7.8125 \text{ ns} + (0.1\% \times \text{trigger offset}))$
<b>IF power trigger</b>		
Sensitivity	min. signal power	$-60 \text{ dBm} + \text{RF attenuation} - \text{RF preamplifier gain (nom.)}$
	max. signal power	$-10 \text{ dBm} + \text{RF attenuation} - \text{RF preamplifier gain (nom.)}$
IF power trigger bandwidth	RBW $> 500 \text{ kHz}$ , swept	40 MHz (nom.)
	RBW $> 20 \text{ kHz}$ , FFT	
	RBW $\leq 500 \text{ kHz}$ , swept	6 MHz (nom.)
	RBW $\leq 20 \text{ kHz}$ , FFT	
<b>Gated sweep</b>		
Gate source		video, external, IF power
Gate delay		31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of delay)
Gate length		31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of gate length)
Max. deviation of gate length		$\pm(7.8125 \text{ ns} + (0.1\% \times \text{gate length}))$

## I/Q data

Interface		GPIB or LAN interface
Memory length		max. 200 Msample I and Q
Word length of I/Q samples	sampling rate $> 64 \text{ MHz}$ or number of samples $> 100 \text{ Msample}$ otherwise	18 bit
		24 bit
Sampling rate		100 Hz to 128 MHz
Max. signal bandwidth (equalized)	$f \leq 7 \text{ GHz}$	40 MHz
	$f > 7 \text{ GHz}$ , YIG preselector = off	40 MHz
Amplitude flatness	$(1.25 \times \text{signal analysis bandwidth}) \leq f_{\text{center}} \leq 7 \text{ GHz}$	$\pm 0.3 \text{ dB}$ (nom.)
	$f > 7 \text{ GHz}$ , YIG preselector = off	$\pm 0.5 \text{ dB}$ (nom.)
Deviation from linear phase	$(1.25 \times \text{signal analysis bandwidth}) \leq f_{\text{center}} \leq 7 \text{ GHz}$	$\pm 1^\circ$ (nom.)
	$f > 7 \text{ GHz}$ , YIG preselector = off	$\pm 2^\circ$ (nom.)

<sup>6</sup> Measured with personal computer equipped with Intel Core2 Duo 2.13 GHz and Gbit LAN interface.

## Real-time spectrum analyzer mode

The specifications of the real-time spectrum analyzer mode are based on the specifications of the signal and spectrum analyzer mode. Therefore these specifications apply also for the real-time spectrum analyzer mode unless otherwise noted. For frequencies > 7 GHz, the specifications for YIG preselector = off apply.

<b>Span</b>		
Range		100 Hz to 40 MHz
Resolution		1 Hz

<b>Frequency readout</b>		
Number of sweep (trace) points		801
Marker resolution		0.01 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10\% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span}/(\text{sweep points}-1)) + 1 \text{ Hz})$
Marker tuning frequency step size		span/800

<b>Sweep time</b>		
Range	real-time spectrum, real-time spectrogram, free run or stop on trigger	52 $\mu$ s to 1 s <sup>7</sup>
	auto rearm trigger	4 $\mu$ s to 1 s
Resolution		4 $\mu$ s

<b>Data acquisition</b>		
A/D converter		
Sampling rate		128 Msample/s
Resolution		16 bit
FFT length		1024
FFT window		Blackman Harris, Flattop, Gaussian, rectangular, Hanning, Kaiser
FFT overlap factor		$\geq 80\%$
Spectrum (FFT) processing rate	span = 40 MHz	250 000/s
Minimum detectable signal duration	span = 40 MHz, SNR > 60 dB	25 ns (nom.)

<b>Resolution bandwidth (-3 dB)</b>		
Range		1 Hz to 400 kHz, fixed span/RBW ratio, dependent on selected FFT window
Span/RBW ratio	selected FFT window	
	Blackman Harris (default)	200
	Flattop	100
	Gaussian	200
	rectangular	400
	Hanning	250
Bandwidth uncertainty	Kaiser	200
		< 3 % (nom.)

<b>Video bandwidths</b>	none
-------------------------	------

<b>Channel bandwidths</b>	none
---------------------------	------

<sup>7</sup> Time period during which individual FFTs contribute to the results of the selected trace detector.

**Level**

<b>Amplitude flatness</b>	( $1.25 \times$ signal analysis bandwidth) $\leq f_{\text{center}}$	$\pm 0.8$ dB (nom.)
	$f > 7$ GHz	$\pm 1$ dB (nom.)

<b>Spurious free dynamic range</b>	span = 40 MHz	< -70 dBc (nom.)
------------------------------------	---------------	------------------

<b>Minimum signal duration necessary for specified level measurement uncertainty<sup>8</sup></b>	trace detector = max. peak, span =	nominal values
	40 MHz	24 $\mu$ s
	20 MHz	45 $\mu$ s
	10 MHz	86 $\mu$ s
	5 MHz	168 $\mu$ s
	2 MHz	414 $\mu$ s
	1 MHz	824 $\mu$ s
	500 kHz	1.7 ms
	200 kHz	4.1 ms
	100 kHz	8.2 ms
	50 kHz	16.4 ms
	20 kHz	41 ms
	10 kHz	82 ms
	5 kHz	164 ms
	2 kHz	410 ms
	1 kHz	820 ms
	500 Hz	1.64 s
	200 Hz	4.1 s
	100 Hz	8.2 s

<sup>8</sup> Events lasting shorter than the minimum event duration specification will result in degraded level accuracy.

## Result display

Display modes		full screen, split screen
Max. number of screens	display mode = split screen	4
Result display types	with or without active frequency mask trigger + any combination if display mode = split screen	real-time spectrum, persistence spectrum, real-time spectrogram, power vs. time, power vs. time waterfall <sup>9</sup>

<b>Real-time spectrum</b>	
Number of traces	4
Trace detector	max. peak, min. peak, sample, average
Trace functions	clear/write, max. hold, min. hold, view
Number of markers	16
Marker readout	frequency, level
Maximum sweep update rate <sup>10</sup>	10 000/s

<b>Persistence spectrum</b>	
Persistence bitmap resolution	801 × 600 points
Persistence bitmap color depth	256 colors
Probability range covered by bitmap colors	selectable, 0 % to 100 %
Persistence duration	0 s to 8 s
Persistence max hold transparency	overlaying display of the maximum level values reached
Number of markers	16
Marker readout	frequency, level, hit probability
Number of real-time traces	in addition to persistence spectrum display
Real-time trace detector	max. peak, min. peak, sample, average
Real-time trace functions	clear/write, max. hold, min. hold, view

<b>Spectrogram</b>	
Result display	color-graded bitmap
Spectrogram bitmap color depth	240 colors
Dynamic range covered by bitmap colors	selectable, up to 200 dB (nom.)
History depth	max. 100 000 frames <sup>11</sup>
Recording mode	single trace, continuous, frame count
Trace detector	max. peak, min. peak, sample
Number of markers	16
Marker readout	frequency, time/frame number, level
Maximum sweep update rate <sup>12</sup>	10 000/s

<b>Power vs. time</b> <sup>9</sup>	
Number of traces	4
Trace detector	max. peak, min. peak, sample, average
Trace functions	clear/write, view
Number of markers	16
Marker readout	time, level
Maximum sweep update rate	1250/s

<sup>9</sup> Requires firmware version 1.56 or higher.

<sup>10</sup> Sweep update rate includes FFT overlap and trace detector processing.

<sup>11</sup> A frame is the measurement result displayed in one row of the spectrogram. It may consist of one or more traces, depending on the set sweep count.  
For example, a sweep count of 2 means that two traces will be combined to one row in the spectrogram using the set trace detector.

<sup>12</sup> Sweep update rate includes FFT overlap and trace detector processing.

<b>Power vs. time waterfall</b> <sup>9</sup>	
Result display	color-graded bitmap
Spectrogram bitmap color depth	240 colors
Dynamic range covered by bitmap colors	selectable, up to 200 dB (nom.)
History depth	max. 100 000 frames <sup>11</sup>
Recording mode	single trace, continuous, frame count
Number of markers	16
Marker readout	time, time/frame number, level
Maximum sweep update rate <sup>12</sup>	1250/s

## I/Q data<sup>9</sup>

Interface	GPIB or LAN interface	
Memory length	max. 200 Msample I and Q	
Word length of I/Q samples	sampling rate > 64 MHz or number of samples > 100 Msample otherwise	18 bit 24 bit
Sampling rate		100 Hz to 128 MHz
Max. signal bandwidth (equalized)	f ≤ 7 GHz f > 7 GHz, YIG preselector = off	40 MHz 40 MHz
Amplitude flatness	(1.25 × signal analysis bandwidth) ≤ f <sub>center</sub> ≤ 7 GHz	±0.3 dB (nom.)
Deviation from linear phase	f > 7 GHz, YIG preselector = off (1.25 × signal analysis bandwidth) ≤ f <sub>center</sub> ≤ 7 GHz	±0.5 dB (nom.) ±1° (nom.)
	f > 7 GHz, YIG preselector = off	±2° (nom.)

## Trigger

<b>Trigger source</b>	free run, frequency mask, time domain trigger, external
-----------------------	---

<b>Frequency mask trigger</b>		
Trigger level resolution		0.5 dB
Minimum necessary mask distance to noise floor		30 dB (nom.)
Dynamic range	frequency mask – reference level	0 dB to –80 dB (nom.)
Trigger level accuracy	frequency mask > reference level – 50 dB frequency mask > reference level – 70 dB	±(frequency response + 1.0 dB) (nom.) ±(frequency response + 2.5 dB) (nom.)
Trigger uncertainty	span = 40 MHz	±12 µs (nom.)
Trigger conditions		enter mask area, leave mask area
Trigger modes		auto rearm trigger, stop on trigger
Trigger mask		
Mask length		3 to 801 frequency points
Mask frequency resolution		span/800
Mask shape generation		manual, auto set (mask derived from the measured spectrum)
Minimum signal duration for 100 % probability of trigger (nominal values) <sup>13</sup>		see minimum signal duration necessary for specified level measurement uncertainty

<b>Trigger out</b>	with R&S®FSV-B5 option	
Connector		BNC female
Output		TTL-compatible, 0 V/5 V (nom.)

<sup>13</sup> Events lasting shorter than the minimum event duration specification will result in degraded frequency mask trigger accuracy.

## Inputs and outputs

RF input		
Impedance		50 Ω
Connector	R&S®FSVR7, R&S®FSVR13	N female
	R&S®FSVR30	test port adapter APC 3.5 mm/N female
	R&S®FSVR40	test port adapter 2.92 mm (K)/N female
VSWR	RF attenuation $\geq 10$ dB	
	10 MHz $\leq f < 3.6$ GHz	< 1.5, 1.3 (typ.)
	3.6 GHz $\leq f < 20$ GHz	< 2, 1.8 (typ.)
	20 GHz $\leq f < 27$ GHz	< 2.2, 2 (typ.)
	27 GHz $\leq f < 30$ GHz	
	DC coupled	< 2.2, 2 (typ.)
	AC coupled	2.5 (meas.)
	30 GHz $\leq f \leq 40$ GHz	
	DC coupled	< 2.5, 2.2 (typ.)
	AC coupled	3 (meas.)
	RF attenuation $< 10$ dB, DC coupled	
	10 MHz $\leq f < 7$ GHz	2 (meas.)
	7 GHz $\leq f < 30$ GHz	2.5 (meas.)
	30 GHz $\leq f \leq 40$ GHz	3 (meas.)
Setting range of attenuator	standard	0 dB to 75 dB, in 5 dB steps
	with R&S®FSV-B25 option	0 dB to 75 dB, in 1 dB steps
Setting range of electronic attenuator	with R&S®FSV-B25 option, $f \leq 7$ GHz	0 dB to 25 dB, in 1 dB steps
	with R&S®FSV-B25 option, $f > 7$ GHz	0 dB to 9 dB, in 1 dB steps
RF preamplifier gain	with R&S®FSV-B22 option	20 dB (nom.)
	with R&S®FSV-B24 option	
	$f \leq 7$ GHz	20 dB (nom.)
	$f > 7$ GHz	30 dB (nom.)

Probe power supply		
Supply voltages		+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)

Noise source drive		
Connector		BNC female
Output voltage		0 V/28 V, max. 100 mA, switchable (nom.)

Power sensor		
Connector		6-pin LEMOSA female for supported R&S®NRP-Zxx power sensors

USB interface		2 ports, type A plug, version 2.0

Reference output		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency	internal reference	10 MHz
	external reference	same as reference input signal
Level		> 0 dBm (nom.)

Reference input		
Connector		BNC female
Impedance		50 Ω (nom.)
Input frequency range		1 MHz $\leq f_{in} \leq 20$ MHz, in 100 kHz steps
Required level		> 0 dBm into 50 Ω (nom.)

<b>External trigger/gate input</b>		
Connector		BNC female
Trigger voltage		0.5 V to 3.5 V (nom.)
Input impedance		10 kΩ (nom.)

<b>IEC/IEEE bus control</b>		
Command set		interface in line with IEC 625-2 (IEEE 488.2)
Connector		SCPI 1997.0
Interface functions		24-pin Amphenol female SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

<b>LAN interface</b>		
Connector		10/100/1000BASE-T RJ-45

<b>External monitor</b>		
Connector		VGA-compatible, 15-pin, mini D-Sub

## General data

Display	21 cm LC TFT color display (8.4")	
Resolution	800 × 600 pixel (SVGA resolution)	
Pixel failure rate	< 1 × 10 <sup>-5</sup>	

Data storage		
Internal	standard	hard disk ≥ 40 Gbyte
	with R&S®FSVR-B18 option	solid state disk ≥ 8 Gbyte
External	supports USB-2.0-compatible memory devices	

Temperature		
Temperature	operating temperature range	+5 °C to +40 °C
	permissible temperature range	0 °C to +50 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading		+40 °C at 90 % rel. humidity, in line with EN 60068-2-30

Mechanical resistance		
Vibration	sinusoidal	5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; in line with EN 60068-2-6
	random	10 Hz to 130 Hz, acceleration 1.2 g (rms), in line with EN 60068-2-64
Shock	40 g shock spectrum, in line with MIL-T-28800F, class 3, MIL-STD-810E, method 516.4, procedure I	

EMC		in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 <sup>14, 15</sup> IEC/EN 61326-2-1 CISPR 11/EN 55011 <sup>15</sup> IEC/EN 61000-3-2 IEC/EN 61000-3-3
-----	--	---

Recommended calibration interval	1 year
----------------------------------	--------

Power supply		
AC input voltage range		100 V to 240 V ±10 % (nom.)
AC supply frequency		50 Hz to 400 Hz +10 %/−6% (nom.)
Max. input current		5.2 A (100 V) to 2.2 A (240 V) (nom.)
Power consumption	R&S®FSVR7	150 W, max. 250 W with all options (meas.)
	R&S®FSVR13, R&S®FSVR30, R&S®FSVR40	175 W, max. 250 W with all options (meas.)
Safety		in line with IEC 61010-1, EN 61010-1, CAN/CSA-C22.2 No. 61010-1-04, UL 61010-1
Test mark		VDE-GS, cCSA <sub>US</sub>

<sup>14</sup> Emission limits for class A equipment.<sup>15</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

<b>Weight and dimensions</b>		
Dimensions (nom.)	W × H × D	412 mm × 197 mm × 517 mm (16.22 in × 7.76 in × 20.35 in)
Net weight without options (nom.)	R&S®FSVR7	12.8 kg (28.22 lb)
	R&S®FSVR13	13.6 kg (29.98 lb)
	R&S®FSVR30	14.0 kg (30.86 lb)
	R&S®FSVR40	14.3 kg (31.52 lb)

## Options

### R&S®FSV-B3 audio demodulator

<b>Demodulation</b>		
AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

<b>AF output</b>		
Connector		3.5 mm mini jack
Output impedance		10 Ω (nom.)
Open-circuit voltage		up to 1.5 V, adjustable

### R&S®FSV-B5 additional interfaces

<b>User port</b>		
Connector		9-pin D-Sub male
Output		TTL-compatible, 0 V/5 V (nom.), max. 15 mA (nom.)
Input		TTL-compatible, max. 5 V (nom.)

<b>IF/video/demod out</b>		
Connector		BNC female, 50 Ω (nom.)
<b>IF out</b>		
Bandwidth		equal to RBW setting
IF frequency		32 MHz (nom.)
Output level (gain versus RF input)	RF attenuation 0 dB, RF preamplifier off, span 0 Hz	0 dB (nom.)
<b>Video out</b>		
Bandwidth		equal to VBW setting
Output scaling	log. display scale lin. display scale	logarithmic linear
Output level	center frequency > 10 MHz, span 0 Hz, signal at reference level and center frequency	1 V, open circuit (nom.)

<b>Trigger out</b>		
Connector		BNC female
Output		TTL-compatible, 0 V/5 V (nom.)

<b>USB interface</b>	2 ports, type A plug, version 2.0
----------------------	-----------------------------------

## R&S®FSV-B17 digital baseband interface<sup>9</sup>

<b>I/Q data IN</b>		
Connector	26-pin female mini D ribbon connector	
Data lines	number of data lines (differential lines) bit rate (on each data line) level	8 396 MHz to 600 MHz LVDS
Clock	clock rate level	66 MHz to 100 MHz LVDS
Communications lines	bidirectional 2-wire interface level	3.3 V
<b>I/Q data OUT</b>		
Connector	26-pin female mini D ribbon connector	
Data lines	number of data lines (differential lines) bit rate (on each data line) level	8 600 MHz LVDS
Clock	clock rate level	100 MHz LVDS
Communications lines	bidirectional 2-wire interface level	3.3 V

## R&S®FSV-B21 LO/IF ports for external mixers (for R&S®FSVR30 and R&S®FSVR40 only)

<b>LO signal</b>		
Frequency range	7.73 GHz to 15.23 GHz	
Level	+20 °C to +30 °C +5 °C to +40 °C	+15.5 dBm ± 1 dB +15.5 dBm ± 3 dB

<b>IF input</b>		
IF frequency	729.9 MHz	
Full-scale level	2-port mixer (LO output/IF input, front panel) 3-port mixer (IF input, front panel)	-20 dBm -20 dBm
Level uncertainty	IF input level –30 dBm, RBW 30 kHz, 2-port mixer, LO output/IF input (front panel) +20 °C to +30 °C +5 °C to +40 °C IF input level –30 dBm, RBW 30 kHz, 3-port mixer, IF input (front panel) +20 °C to +30 °C +5 °C to +40 °C	< 1 dB < 3 dB < 1 dB < 3 dB

<b>Inputs and outputs</b>	
LO output/IF input	SMA female, 50 Ω
IF input	SMA female, 50 Ω

## Ordering information

Designation	Type	Order No.
Real-Time Spectrum Analyzer	R&S®FSVR7	1311.0006.07
Real-Time Spectrum Analyzer	R&S®FSVR13	1311.0006.13
Real-Time Spectrum Analyzer	R&S®FSVR30	1311.0006.30
Real-Time Spectrum Analyzer	R&S®FSVR40	1311.0006.40
<b>Accessories supplied</b>		
Power cable, quick start guide and CD-ROM (with operating manual and service manual)		
R&S®FSVR30: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connectors		
R&S®FSVR40: test port adapter with 2.92 mm (K) female (1036.4790.00) and N female (1036.4777.00) connectors		

## Options

Designation	Type	Order No.	Retrofittable	Remarks
Audio Demodulator	R&S®FSV-B3	1310.9516.02	yes	retrofit in service center
OCXO Reference Frequency	R&S®FSV-B4	1310.9522.02	yes	user-retrofittable
OCXO Extended Frequency Stability	R&S®FSV-B4	1310.9522.03	yes	user-retrofittable
Additional Interfaces	R&S®FSV-B5	1310.9539.02	yes	IF out, video out, AUX port, trigger out, 2 × USB
Digital Baseband Interface	R&S®FSV-B17	1310.9568.02	yes	user-retrofittable, for details ask service center
Solid State Drive (removable hard drive)	R&S®FSVR-B18	1310.9697.08	yes	user-retrofittable
Spare Hard Drive (removable hard drive)	R&S®FSVR-B19	1310.9574.08	yes	user-retrofittable
LO/IF Ports for External Mixers	R&S®FSV-B21	1310.9597.02	no	R&S®FSVR30 and R&S®FSVR40 only
RF Preamplifier (9 kHz to 7 GHz)	R&S®FSV-B22	1310.9600.02	yes	user-retrofittable
RF Preamplifier (9 kHz to 13.6 GHz)	R&S®FSV-B24	1310.9616.13	no	
RF Preamplifier (9 kHz to 30 GHz)	R&S®FSV-B24	1310.9616.30	no	
RF Preamplifier (9 kHz to 40 GHz)	R&S®FSV-B24	1310.9616.40	no	
Electronic Attenuator, 1 dB steps	R&S®FSV-B25	1310.9622.02	yes	user-retrofittable
<b>Firmware/software</b>				
FM Stereo Measurements	R&S®FSV-K7S	1310.8126.02		
Bluetooth®/EDR Measurements	R&S®FSV-K8	1310.8155.02		
Power Sensor Measurement with R&S®NRP-Zxx Power Sensors	R&S®FSV-K9	1310.8203.02		supports R&S®NRP-Zxx power sensors
Analysis of GSM, EDGE and EDGE Evolution Signals	R&S®FSV-K10	1310.8055.02		
Noise Figure and Gain Measurements	R&S®FSV-K30	1310.8355.02		
Phase Noise Measurement Application	R&S®FSV-K40	1310.8403.02		
Vector Signal Analysis	R&S®FSV-K70	1310.8455.02		
Analysis of 3GPP FDD Base Station Signals incl. HSPA+	R&S®FSV-K72	1310.8503.02		
3GPP FDD UE Analysis incl. HSPA+	R&S®FSV-K73	1310.8555.02		
3GPP TD-SCDMA BTS Measurements	R&S®FSV-K76	1310.8603.02		
TD-SCDMA UE Measurements	R&S®FSV-K77	1310.8655.02		
Analysis of CDMA2000® Base Station Signals	R&S®FSV-K82	1310.8703.02		
CDMA2000® MS Measurements	R&S®FSV-K83	1310.8755.02		
Analysis of 1xEV-DO Base Station Signals	R&S®FSV-K84	1310.8803.02		
1xEV-DO MS Measurements	R&S®FSV-K85	1310.8778.02		
Analysis of WLAN 802.11a, b, g, j Signals	R&S®FSV-K91	1310.8903.02		
Extension of R&S®FSV-K91 to 802.11n	R&S®FSV-K91n	1310.9468.02		
Analysis of WiMAX™ 802.16 SISO Signals	R&S®FSV-K93	1310.8955.02		
Analysis of EUTRA/LTE FDD Downlink Signals	R&S®FSV-K100	1310.9051.02		
Analysis of EUTRA/LTE FDD Uplink Signals	R&S®FSV-K101	1310.9100.02		
EUTRA/LTE Downlink MIMO Measurements	R&S®FSV-K102	1310.9151.02		
Analysis of EUTRA/LTE TDD Downlink Signals	R&S®FSV-K104	1309.9774.02		
Analysis of EUTRA/LTE TDD Uplink Signals	R&S®FSV-K105	1309.9780.02		
<b>Analysis software</b>				
OFDM Vector Signal Analysis	R&S®FSV-K96PC	1310.0202.06		
Distortion Analysis Software	R&S®FSV-K130PC	1310.0090.06		

## Upgrade Kits<sup>16</sup>

Designation	Type	Order No.	Retrofittable	Remarks
Windows 7 Upgrade for R&S®FSVR	R&S®FSVR-U1	1311.2250.02	yes	user-retrofittable
Solid State Drive (removable hard drive)	R&S®FSVR-B18	1310.9697.07	yes	user-retrofittable
Spare Hard Drive (removable hard drive)	R&S®FSVR-B19	1310.9574.07	yes	user-retrofittable

<sup>16</sup> For R&S®FSVR with the following serial numbers: R&S®FSVR7: ≤ 100906, R&S®FSVR13: ≤ 101566, R&S®FSVR30: ≤ 101140, R&S®FSVR40: ≤ 100941.

## Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IIEEE Bus Cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IIEEE Bus Cable, length: 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter (not for R&S®FSV-B1)	R&S®ZZA-478	1096.3248.00
<b>Matching pads, 50/75 Ω</b>		
L Section, matching at both ends	R&S®RAM	0358.5414.02
Series Resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
<b>SWR bridges, 50 Ω</b>		
SWR Bridge, 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.5X
SWR Bridge, 40 kHz to 4 GHz	R&S®ZRC	1039.9492.5X
<b>High-power attenuators</b>		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
<b>Connector</b>		
Probe Power Connector, 3-pin		1065.9480.00
<b>DC block</b>		
DC Block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.02
<b>For R&amp;S®FSVR30 only</b>		
Test Port Adapter, N male		1021.0541.00
Test Port Adapter, 3.5 mm male		1021.0529.00
Microwave Measurement Cable with test port adapter set (N male and 3.5 mm male)	R&S®FSE-Z15	1046.2002.02
<b>For R&amp;S®FSVR40 only</b>		
Test Port Adapter, N male		1036.4783.00
Test Port Adapter, K male		1036.4802.00
Test Port Adapter, 2.4 mm female	R&S®FSE-Z5	1088.1627.02

## Power sensors supported by the R&S®FSV-K9 option <sup>17</sup>

Designation	Type	Order No.
Universal Power Sensor, 10 MHz to 8 GHz, 200 mW	R&S®NRP-Z11	1138.3004.02
Universal Power Sensor, 10 MHz to 18 GHz, 200 mW	R&S®NRP-Z21	1137.6000.02
Universal Power Sensor, 10 MHz to 18 GHz, 2 W	R&S®NRP-Z22	1137.7506.02
Universal Power Sensor, 10 MHz to 18 GHz, 15 W	R&S®NRP-Z23	1137.8002.02
Universal Power Sensor 10 MHz to 18 GHz, 30 W	R&S®NRP-Z24	1137.8502.02
Power Sensor Module with Power Splitter, DC to 18 GHz, 500 mW	R&S®NRP-Z27	1169.4102.02
Power Sensor Module with Power Splitter, DC to 26.5 GHz, 500 mW	R&S®NRP-Z37	1169.3206.02
Thermal Power Sensor, 0 Hz to 18 GHz, 100 mW	R&S®NRP-Z51	1138.0005.02
Thermal Power Sensor, 0 Hz to 40 GHz, 100 mW	R&S®NRP-Z55	1138.2008.02
Thermal Power Sensor, 0 Hz to 50 GHz, 100 mW	R&S®NRP-Z56	1171.8201.02
Thermal Power Sensor, 0 Hz to 67 GHz, 100 mW	R&S®NRP-Z57	1171.8401.02
Wideband Power Sensor, 50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81	1137.9009.02
Wideband Power Sensor, 50 MHz to 40 GHz, 100 mW	R&S®NRP-Z85	1411.7501.02
Average Power Sensor, 9 kHz to 6 GHz, 200 mW	R&S®NRP-Z91	1168.8004.02
Average Power Sensor, 9 kHz to 6 GHz, 2 W	R&S®NRP-Z92	1171.7005.02
Two-Path Diode Power Sensor, 10 MHz to 8 GHz, 100 mW	R&S®NRP-Z211	1417.0409.02
Two-Path Diode Power Sensor, 10 MHz to 18 GHz, 100 mW	R&S®NRP-Z221	1417.0309.02

<sup>17</sup> For average power measurement only.

## Service options

<b>Service options</b>		
Extended Warranty, one year	R&S®WE1	
Extended Warranty, two years	R&S®WE2	
Extended Warranty, three years	R&S®WE3	
Extended Warranty, four years	R&S®WE4	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	
Extended Warranty with Calibration Coverage, two years	R&S®CW2	
Extended Warranty with Calibration Coverage, three years	R&S®CW3	
Extended Warranty with Calibration Coverage, four years	R&S®CW4	

### Extended warranty with a term of one to four years (WE1 to WE4)

Repairs carried out during the contract term are free of charge <sup>18</sup>. Necessary calibration and adjustments carried out during repairs are also covered. Simply contact the forwarding agent we name; your product will be picked up free of charge and returned to you in top condition a couple of days later.

### Extended warranty with calibration (CW1 to CW4)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>18</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA -USA).

WiMAX Forum is a registered trademark of the WiMAX Forum. WiMAX, the WiMAX Forum logo, WiMAX Forum Certified, and the WiMAX Forum Certified logo are trademarks of the WiMAX Forum.

---

<sup>18</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.